

Compass®
Bathroom Sink
K-2298

Features

- Petite round design.
- No faucet holes; requires wall- or counter-mount faucet.

Material

Vitreous china.

Installation

Drop-in or under-mount.

Recommended Products/Accessories

K-9018 P-Trap

Included Components

Additional Components: 1193643 Basin clamps Adjustable linkage



ADA CSA B651

Codes/Standards ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1

CSA B651

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	95	Ice™ Grey
413	7	Black Black™
	71	Seafoam Green
	97	Timberline™





Compass® Bathroom Sink K-2298



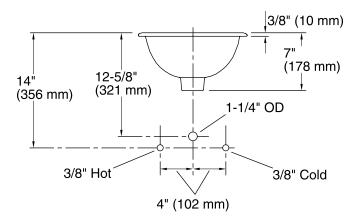

Technical Information

All product dimensions are nominal.


Installation: Drop-in, Under-mount

Bowl area: Diameter: 10-5/8" (270 mm)

Water depth: 4-3/4" (121 mm)

Drain hole: 1-3/4" (44 mm)

Template: 116214-7, required, included



	Α
Drop-in	4-3/8" (137 mm)
Under-mount (shown)	4-3/8" (137 mm)

Notes

Install this product according to the installation instructions.

Spout must be a minimum of 4-1/2" (114 mm) long for adequate clearance into bathroom sink. Supplied basin clamp assembly for under-mount installation requires 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

