


- GT529-WH1C Finish(C)
- GT529-WH1S Finish(S)
- GT529-WH1Y Finish(Y)

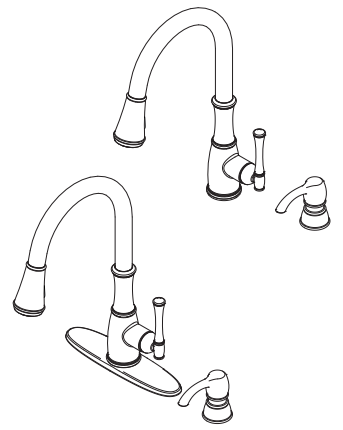

## Specifications

### Features

- 1.8 GPM Flow Rate
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer
- AccuDock™ Spray Head Docking
- 360° Rotating Spout
- Forward Handle Operation
- Mounting Hardware Included
- Nylon Flex-Line Supply Lines
- Soap Dispenser Included
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



## Dimensions

