

Pressure Balancing Valve

FEATURES

- Corrosion resistant
- Anti-scald valve
- Adjustable temperature limit stop
- Tub port for use with diverter tub spout
- Integral shut-offs / check valves
- 1/2" NPT / sweat connections
- Back-to-back installation compatible without cross-over piping
- Optimized for minimum flow rate of 1.5 gpm (5.7 lpm)

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, ASSE 1016
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION


Pressure balancing valve shall have anti-scald protection and an adjustable temperature limit stop. Valve shall have tub port for use with diverter tub spout. Valve shall have integral shut-offs / check valve. Valve shall have 1/2" NPT / sweat connections. Valve model shall be TSPTM. Requires pressure balance trim.

TSPTM

Pressure Balancing Valve

SPECIFICATIONS

- Recommended
 - Operating Pressure 20 psi - 80 psi
 - Warranty Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material Brass
- Shipping Weight 2.6 lbs.
- Shipping Dimensions 5"L x 5"W x 4-7/8"W

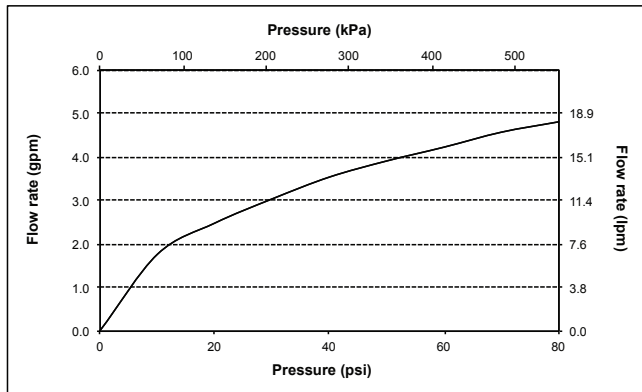

*Measured with tub spout TS210EV

INSTALLATION NOTES

TRIM REQUIRED:

Pressure balance trim sold separately.

Tub spout must be installed 12" ± 1" below valve center.

The showerhead must be installed 40" or more above valve center.

